



Innovation in Environmental & Process Technology

We **Understand** Water & Waste Water Monitoring

BBE Algae Online Analyser


Features:

- Algae online analysis
- Alternating channel measurements in sequence
- Remote data access
- Algae breeding ex works
- Reduced maintenance due to cleaning mechanism

Applications:


- Regulatory control and monitoring
- Environmental monitoring
- Liminological questions
- Planktothrix detection

Rapid measurement of microalgae using a flow-through chamber

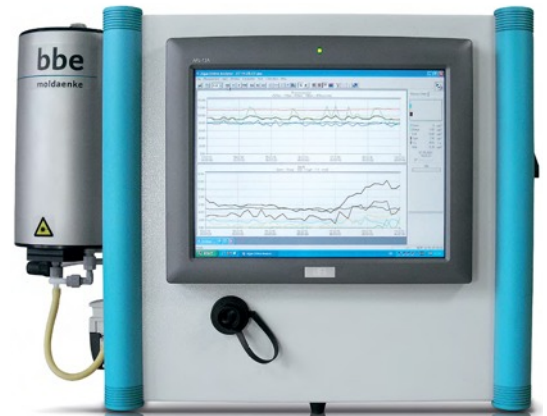

Benefits:

- Immediate analysis of Chlorophyll content
- Covers all algae classes with six excitation wavelengths
- Adjustable alarm thresholds
- Prompt information on cyanobacteria on-site
- Long-term operation
- Calibrated using real algal cultures
- Evaluation of the algal condition of the flow-through sample
- Simple operation with touchscreen PC

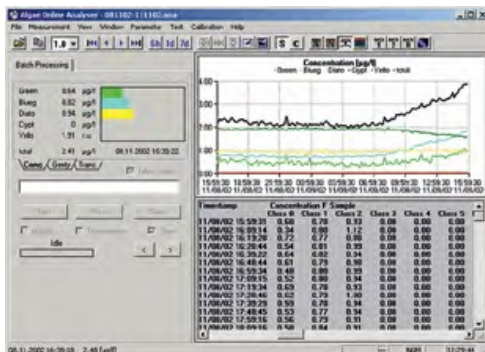

The AlgaeOnlineAnalyser is used in measuring stations and laboratories, in fact anywhere where the **online assessment of water quality** of flowing waters, reservoirs and of drinking water extraction is needed.

On board ships and integrated into complex analytical systems, the AlgaeOnlineAnalyser determines biologically relevant data of commonly travelled shipping routes. Further applications are in the detection of the early stages of **algal blooms**, of **ecological changes** in diverse phytoplankton and in **limnology**, as well as in **oceanology**.

The purpose of algal class determination is the qualitative and quantitative detection and evaluation of the occurrence of particular types of algae, particularly those which can be classified as potentially harmful. This includes e.g. the cyanobacteria *Planktothrix rubescens*, which increasingly occur in reservoirs used for drinking water extraction.

Contact us for more info:

Info@envitech.co.uk Tel: 0044 2920 364252

www.envitech.co.uk



Innovation in Environmental & Process Technology

We **Understand** Water & Waste Water Monitoring

The measurement principle

The AlgaeOnlineAnalyser continuously determines the algal content of water based on chlorophyll fluorescence in real time and without the need for sample preparation. The chlorophyll-a measurement is used as an approximation of the biomass of the micro-phytoplankton in the water. The measurement is based on the natural fluorescence of the photosynthesis apparatus of chlorophyll using excitation by Light sources. Comprehensive excitation of all microalgae is made possible by **six different LEDs** at particular frequencies.

The presence of characteristic pigments in the algae influences chlorophyll-a fluorescence. A complex spectral analysis leads to the allocation of the fluorescence signal to particular algal classes. Up to five Different algal classes can be determined simultaneously.

In contrast to other commercially available chlorophyll measurement instruments, the AlgaeOnlineAnalyser is calibrated using **real algal Cultures**.

The fluorescence measurement corresponds to the time-intensive, wet-chemical chlorophyll analysis according to **ISO 10260** and **DIN38412/16**. However, in contrast to wet-chemical analysis, the Algae-OnlineAnalyser needs no sample preparation and can even replace The laborious method of cell counting with a microscope.

Fluometric determination using the AlgaeOnlineAnalyser is highly sensitive due to the use of a low-noise photomultiplier



The components of the AlgaeOnlineAnalyser



Contact us for more info:

Info@envitech.co.uk Tel: 0044 2920 364252

www.envitech.co.uk



Technical Data

Measurands:	Total chlorophyll [g chl a/l] Concentration of green algae [g chl a/l] Concentration of cyanobacteria [μ g chl a/l] Concentration of blue green algae [g chl a/l] Concentration of diatoms [g chl a/l] Concentration of cryptophyceae [g chl a/l] Yellow substance (relative units)
Chlorophyll:	0-200 μ g chlorophyll-a/l
Measurement principle	Spectral fluorometry
Resolution:	0.01 μ g chlorophyll-a/l
Transmission:	0 - 100%. photometry
Photosynthetic activity:	0-1 for > 3 μ g chlorophyll-a/l
Cleaning function:	Cleaning piston
Housing	V4A steel/aluminium/coated steel plate
Weight :	19 kg
Protection class:	IP54
Size (H x W x D):	420 x 600 x 200 mm
Power supply:	110/230 V 50/60 Hz
Power input:	100 W
Sample temperature:	0-40° C
Sample volume:	30 ml
Maintenance interval:	>7 days
Sample feed:	Free pressureless inlet / peristaltic pump
PC:	Touchscreen PC 12" with windows, bbe++ software
Outputs:	USB, LAN, R232
Optional outputs:	Modem, analogue outputs 4-20 mA up to 16, relay outputs up to 8, SDI-12 converter, Modbus TCP/IP

Optional

Please indicate

1. What digital and analogue outputs are required
2. Whether a weather proof housing is required
3. Whether PC operation is required